



LASER SWISS

The Benefits of CNC Laser Cutting with Swiss Machining.

- Fully Integrated Laser Cutting System
- Full Swiss Machining Capability
- Through-Part Coolant
- Automatic Part Handling Options
- Rock Solid Fanuc 32I-B Control





AMETEK ENGINEERED MEDICAL COMPONENTS

- New Capability: CNC Machining Laser-Swiss
- · Installing in Waukegan, IL facility
- When available: O2 2022

CRITICAL CAPABILITIES:

- Fully Integrated Laser cutting System
- · Full Swiss Machining Capability
- Maximum machine thru diameter 20 mm
- Tool Positions 38
- Laser 300 w Fiber
- Focal Length 100 mm
- 6 Ft tube/bar feeder system (1mm 20 mm)
- Main and Back Spindle synchronization capable
- Multiple assist gas capable
- · Laser welding as well as cutting

This new capability will be available for laser cutting and CNC machining precision tube and rod components from 1mm – 20 mm in diameter. Lengths can vary because the back spindle can bring material out of the main spindle then machining can continue. Practically


speaking we are targeting 24 inches maximum. Unique CNC machined features will require purchase of dedicated tooling. ID work as well as OD work will be capable of being done on both ends of the tube/rod component.



Brass rod precision CNC machined.

CAPABILITIES:


- ID Expansion / Increase
- 2) Laser Cut Pattern
- 3) OD Reduction
- 4) CNC drilling

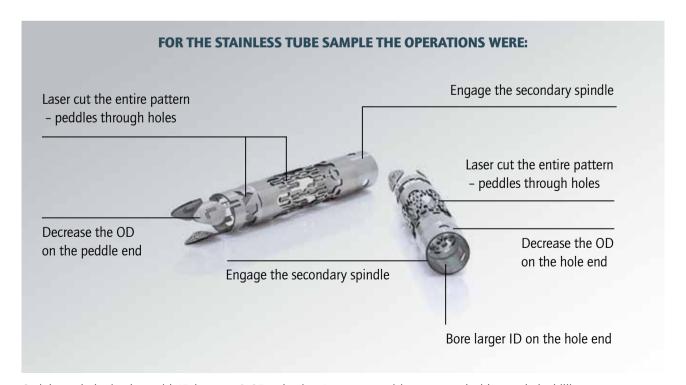



MEDICAL MARKETS:

This equipment can be utilized for unlimited medical fields. However, AMETEK EMC is targeting four (4) medical markets:

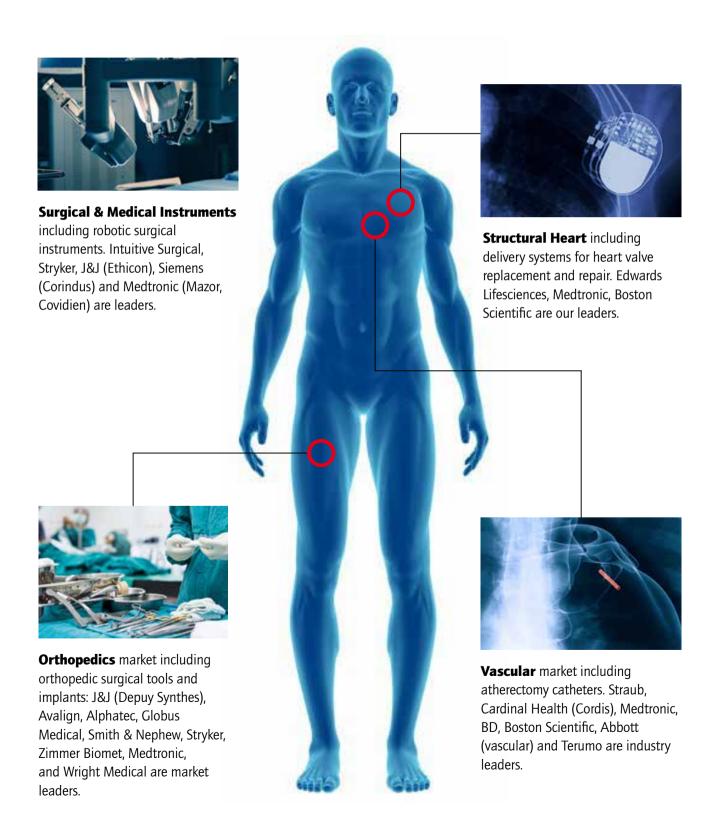



IMAGINE THE POSSIBILITIES!

The ability to combine 6-axis Swiss machining and laser cutting in one machine eliminates many manufacturing constraints. It frees your design considerations. You'll have up to 36 tools, plus the laser. Use whatever mix of methods produces the features needed at the fastest times.

REDUCE MANPOWER MEANS REDUCTION OF COST

The Laser Swiss comes with an automatic bar feeder modified to deliver through-part coolant for the kinds of thin-walled tubing ideal for medical components. You can also automate the handling of finished parts as necessary. We even have a database of proven feeds, speeds, power setting, etc. for commonly used materials to speed time to market.

FREE FLOOR SPACE MEANS SMART INVESTMENTS AND BETTER VALUE PROPOSITION

Multitasking capability allows reduction of single purpose machines. Plus the LaserSwiss itself occupies only 31 sq ft (excluding bar feeder and gas tank).

It all adds up to higher quality product with better manufacturing value. Provide a design for a free manufacturing estimate.



Creating these part features requires threading, chamfering, and laser cutting, all of which were accomplished in under fifteen seconds.



Laser cut flex patterns with other attachment forms for laser welded assemblies.




WHAT DOES COMBINING LASER CUTTING & SWISS MACHINING ON ONE MACHINE DO FOR OUR CUSTOMERS?

WORLD'S FIRST AND A DREAM COME TRUE

CNC Swiss machining is astonishingly productive. But the delicacy of some parts makes it difficult to apply traditional metal cutting techniques. And some features simply can't be cut effectively with a mill or a turning tool, no matter how small. For those challenges, you'd typically move the part to a laser cutting machine, or you'd live with inferior cuts, poor cycle times, and lots of post-processing. No more. AMETEK EMC has combined Swiss turning machine with a complete precision laser cutting system. We've dreamt of this possibility for years and now it's here...

TRIPLE YOUR THROUGHPUT— OR MORE

We've seen cases in which the LaserSwiss is FIVE times more productive than the current approach. Naturally every situation is different, but productivity by eliminating multiple setups and deburring operations is our goal.



Combine CNC Laser Cutting and...



Traditional Swiss Machining in Seconds



MACHINE SPECIFICATIONS

	ITEMS	Installed Capability
Laser System	Model	Fiber laser
	Power Setting Range	30 - 300 W
	Wavelength	1,070 nm
	Frequency Range	2 - 20 kHz
	Pulse Width	0-CW
	Focal Length	100 mm with 10 mm servo controlled focus adjustment
	Interface	IMG engineered interface enables "on the fly" adjustment of power, pulse width, frequency, lens focus, and nozzle standoff from the CNC part program
	Maximum Cutting Speed	20 IPS (500 mm/sec)
	Maximum Wall Thickness for Laser Cutting	0.06" (1.5 mm)
	Maximum Machining Diameter	0.787" (20 mm)
	Maximum Machining Length	8.26" (210 mm) per chucking
	Main Spindle Speed	200 - 10,000 RPM
	Rotary Tool Spindle Speed	200 - 8,000 RPM
Conventional Machining	Back Spindle Max. Diameter	0.787" (20 mm)
	Back Spindle Front Ejection Maximum Length	3.2" (80 mm)
	Back Spindle Speed	200 - 10,000 RPM
	Rapid Traverse Rate: X2, Z1, Z2	1,260 IPM (32 m/min)
	Rapid Traverse Rate: X1, Y1	945 IPM (24 m/min)
	Rapid Traverse Rate: Y2	590 IPM (15 m/min)
	Center Height	39.37" (1,000 mm)
Motors	Main Spindle	5 HP (2.3 /3.7 kW)
	Back Spindle	3 HP (1.5 /2.3 kW)
	Rotary Tool	1.0 HP (0.7 kW)
	Coolant Pump	0.5 HP (0.3 kW)



MACHINE SPECIFICATIONS

	ITEMS	Installed Capability
Mountable Tools	Total Tools (Excluding Laser)	36
	Gang Tool Post (Turning)	5
	Gang Tool Post (Live)	5
	Front Rotary Tools	0 to 4
	Front Drills, Standard	5
	Front Drills, Deep Hole	2 (100 mm)
	Back Tools	8 to 17 (back 8 + front drill 5 + double face 4)
Tooling Size	Turning Size	1/2" Sq
	Main Spindle Collet Holders	22 mm
	Sub Spindle Collet Holders	20 mm
	Main Spindle Collet	TF 25
	Back Spindle Collet	TF 25
Collets /	Electric Guide Bushing	TD 26
Bushings	Cage Type Buide Bushing	TD 25
	Rotary Tool Collet	ER 16 / ER 11
	Chuck Sleeve Collet	ER 16 / ER 11
Bar Feeder	FMB-2-20 - 0.8-20	FMB Turbo 0.8-20 12' bar feeder with through-part coolant interface. Capacity 0.8 to 20 mm (0.030 to 0.787")
General	Control	FANUC 32i-B
	Mist Extractor	3Nine Clara model, 700 CFM with HEPA filter
	Coolant System	MP Systems 1,000 PSI pump with through-part interface to the bar feeder. Includes M Function control
	Input Power	6 kVA
	Weight	7,260 lbs (3,290 kg)
	Footprint: Base Machine	53 x 83" (135 x 221 cm)
	Footprint: Assist Gas Tank (not required with central system)	30" diameter (76 cm)
	Footprint: Bar Feeder	20 x 209" (51 x 531 cm)



AMETEK EMC AT A GLANCE

AMETEK Engineered Medical Components (EMC) is a market leader in delivering optimal solutions for the medical device industry. Comprised of three businesses: Avicenna, Technical Services for Electronics, and Laserage, AMETEK EMC has served the medical device industry for more than 40 years.

Each business is a leader in its respective product category and is well established in delivering state-of-the-art technology solutions with our experience in: product design and development, precision engineering, pre-production to commercialized manufacturing, supply chain management, and quality assurance for cable assemblies and custom interconnects, laser processed polymers, catheter assemblies and sub-components, laser processed metals including NiTi and metal post processing.

AMETEK Engineered Medical Components (EMC) is a business unit of AMETEK, Inc. a leading global manufacturer of electronic instruments and electromechanical devices with annualized sales of approximately \$5.5 billion.



7800 Equitable Drive, Minneapolis MN 55344, United States

E: emc.info@ametek.com | **T:** +1 612 426 3555

www.ametekemc.com

